



Product Summary



V_{DS}	$R_{DS(ON)_TYP}$	I_{D_MAX}
120 V	5.6 mΩ @ $V_{GS} = 10V$	87 A

PDFN5060-8L


Top View



Bottom View


PIN Configuration
(Top View)


Schematic Diagram

Features

- Low On-Resistance
- Excellent FoM (figure of merit)
- 100% UIS and R_g tested


Applications

- DC/DC in Telecoms and Industrial
- Synchronous Rectification in SMPS
- Hard Switching and High Speed Circuit

Mechanical Data

- Green Molding Compound
- Moisture Sensitivity: Level 1 per J-STD-020
- UL Flammability Classification Rating 94V-0

Ordering Information

Orderable Part Number	Package Type	Device Marking	Form	Quantity (pcs)
SMT12T07AHP	PDFN5060-8L	12T07AH	13" Tape&Reel	5,000

Maximum Ratings (@ $T_C = 25^\circ\text{C}$, unless otherwise specified.)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	120	V
Gate - Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ($V_{GS} = 10V$) ⁽¹⁾	I_D	$T_C = 25^\circ\text{C}$ 87	A
		$T_C = 100^\circ\text{C}$ 55	A
Pulsed Drain Current ⁽²⁾	I_{DM}	349	A
Single Pulse Avalanche Energy ⁽³⁾	E_{AS}	336	mJ
Single Pulse Avalanche Current ($L = 0.1\text{mH}$)	I_{AS}	47	A
Power Dissipation	P_D	$T_C = 25^\circ\text{C}$ 96	W
		$T_C = 100^\circ\text{C}$ 38	W
Junction & Storage Temperature Range	T_J, T_{STG}	-55 ~ +150	$^\circ\text{C}$

Thermal Characteristics

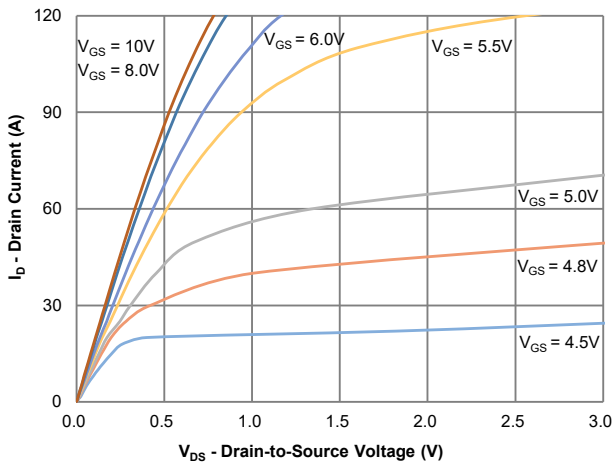
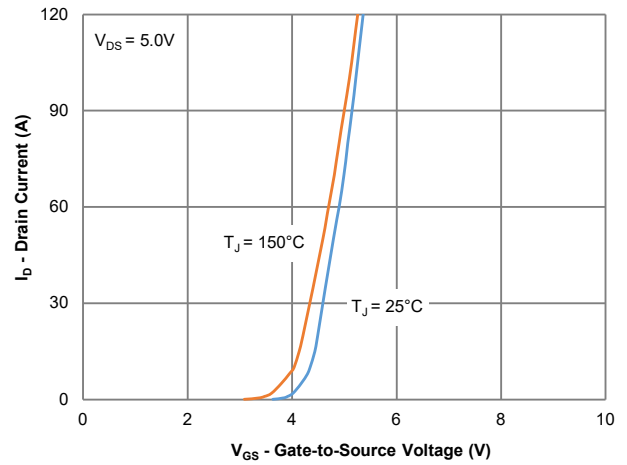
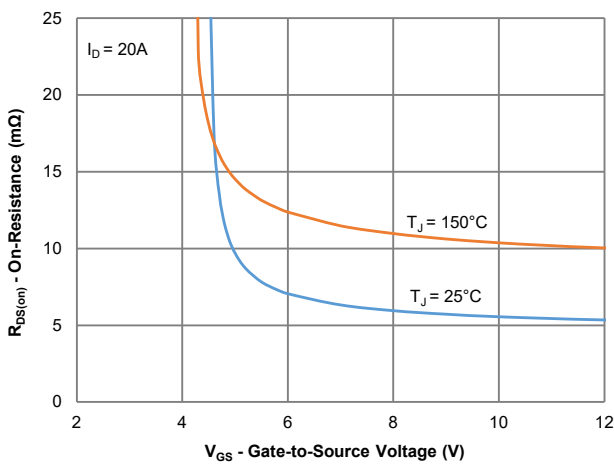
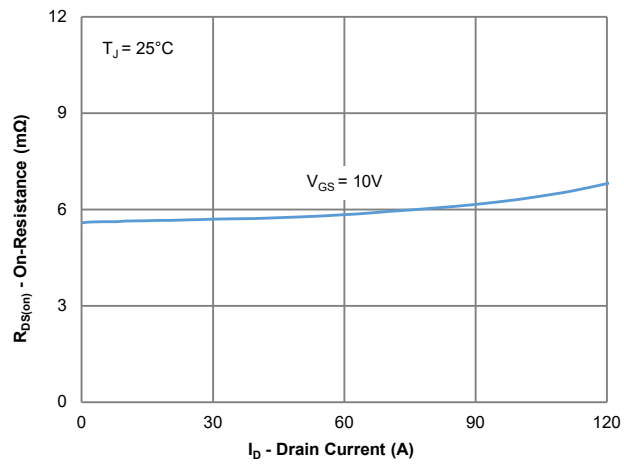
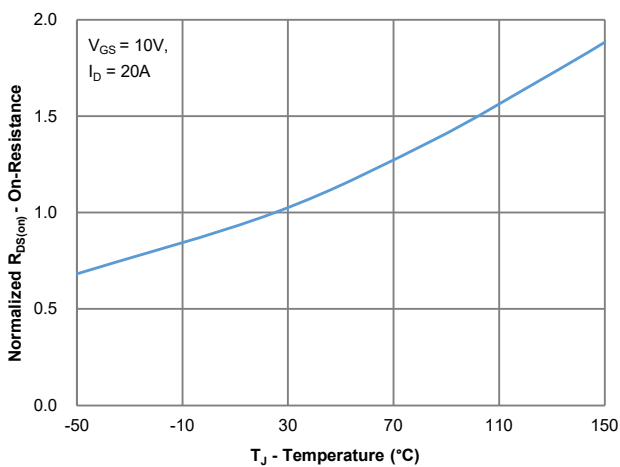
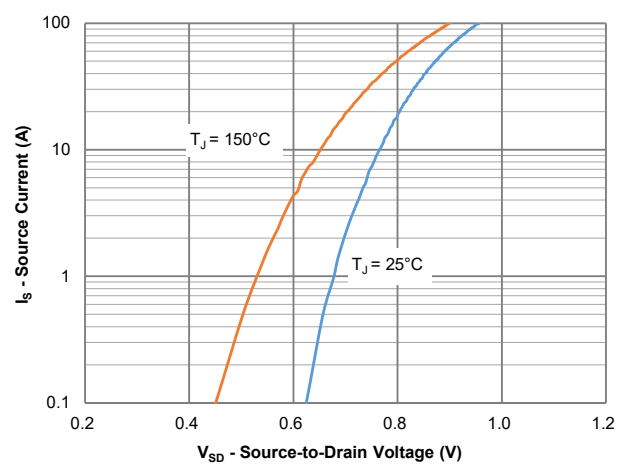
Parameter	Symbol	Typ.	Max.	Unit
Thermal Resistance, Junction-to-Ambient ⁽⁴⁾	$R_{\theta JA}$	35	43	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case ⁽⁵⁾	$R_{\theta JC}$	1.0	1.3	$^\circ\text{C/W}$

Electrical Characteristics (@ $T_J = 25^\circ\text{C}$, unless otherwise specified.)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Off Characteristics ⁽⁶⁾						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = 250μA	120	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 120V, V _{GS} = 0V	-	-	1.0	μA
		T _J = 125°C	-	-	100	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V	-	-	±100	nA
On Characteristics ⁽⁶⁾						
Gate Threshold Voltage	V _{GS(th)}	V _{GS} = V _{DS} , I _D = 250μA	2.0	3.0	4.0	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 20A	-	5.6	6.7	mΩ
Forward Transconductance	g _{fs}	V _{DS} = 5.0V, I _D = 20A	-	36	-	S
Diodes Forward Voltage	V _{SD}	I _S = 2.0A, V _{GS} = 0V	-	0.7	1.2	V
Dynamic Characteristics ⁽⁷⁾						
Input Capacitance	C _{iss}	V _{DS} =60V, V _{GS} = 0V, f = 1MHz	-	2119	-	pF
Output Capacitance	C _{oss}		-	928	-	pF
Reverse Transfer Capacitance	C _{rss}		-	17	-	pF
Gate Resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1MHz	-	1.1	-	Ω
Switching Characteristics ⁽⁷⁾						
Turn-On DelayTime	t _{d(on)}	V _{GS} = 10V, V _{DS} = 60V I _D = 20A, R _{GEN} = 3.0Ω	-	6.8	-	ns
Rise Time	t _r		-	8.7	-	ns
Turn-Off DelayTime	t _{d(off)}		-	18	-	ns
Fall Time	t _f		-	9.0	-	ns
Gate Charge Characteristics ⁽⁷⁾						
Total Gate Charge (V _{GS} = 10V)	Q _g	V _{DS} = 60V, I _D = 20A V _{GS} = 10V	-	32	-	nC
Total Gate Charge (V _{GS} = 6.0V)	Q _g		-	20	-	nC
Gate-Source Charge	Q _{gs}		-	8.5	-	nC
Gate-Drain Charge	Q _{gd}		-	6.6	-	nC
Gate Plateau Voltage	V _{plateau}		-	4.4	-	V
Drain-Source Diode Characteristics ⁽⁷⁾						
Body Diode Reverse Recovery Time	t _{rr}	I _F = 20A, dI/dt = 100A/μs, T _J = 25°C	-	60	-	ns
Body Diode Reverse Recovery Charge	Q _{rr}		-	123	-	nC
Diode Forward Current	I _S	T _C = 25°C	-	-	87	A

Notes:

1. This current is chip limited, which is calculated based on R_{thjc} .
2. This current is calculated on single pulse with 10 μs Single Pulse.
3. Defined by design, not subject to production test, E_{AS} condition: $T_J = 25^\circ\text{C}$, $V_{DD} = 60V$, $V_{GS} = 10V$, $L = 1.0\text{mH}$.
4. Device mounted on FR-4 substrate PC board with 2oz copper in 1inch square cooling area.
5. Thermal resistance from junction to the exposed drain pad.
6. Short duration pulse test used to minimize self-heating effect.
7. Defined by design, not subject to production.

Typical Electrical and Thermal Characteristics

Figure 1: Output Characteristics

Figure 2: Transfer Characteristics

Figure 3: On-Resistance vs. Gate-Source Voltage

Figure 4: On-Resistance vs. Drain Current and Gate Voltage

Figure 5: On-Resistance vs. Junction Temperature

Figure 6: Source-Drain Diode Forward Voltage

Typical Electrical and Thermal Characteristics

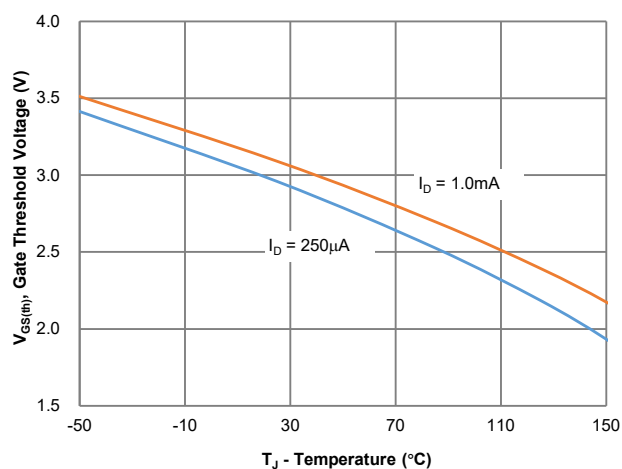


Figure 7: Gate Threshold Variation vs. Junction Temperature

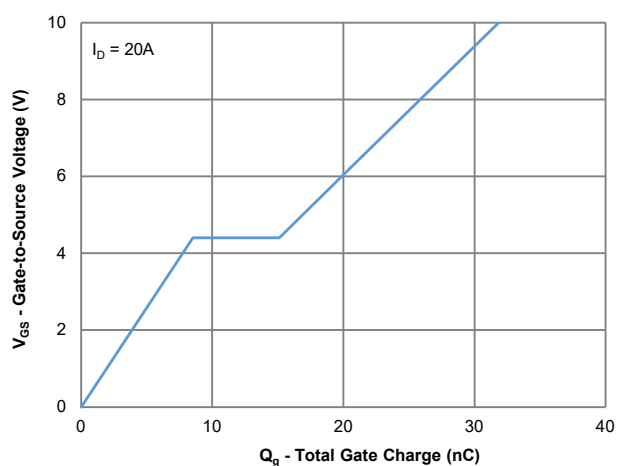


Figure 8: Gate Charge Characteristics

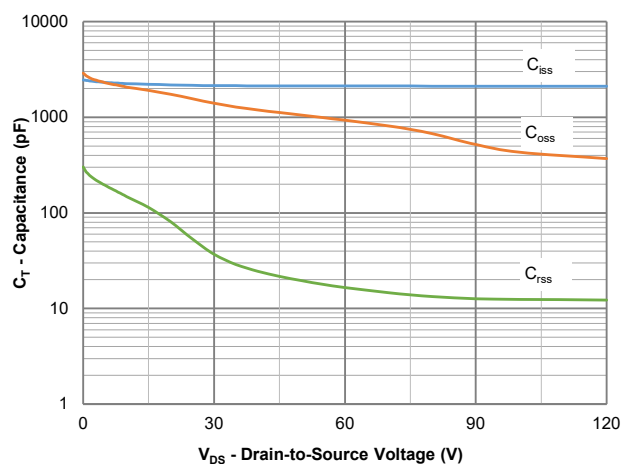


Figure 9: Capacitance Characteristics

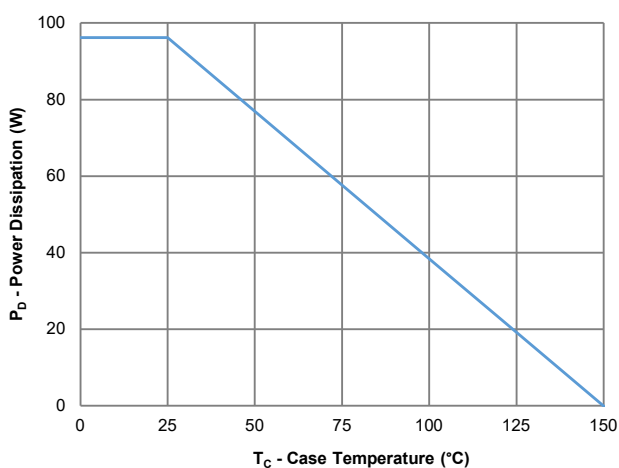


Figure 10: Power Derating

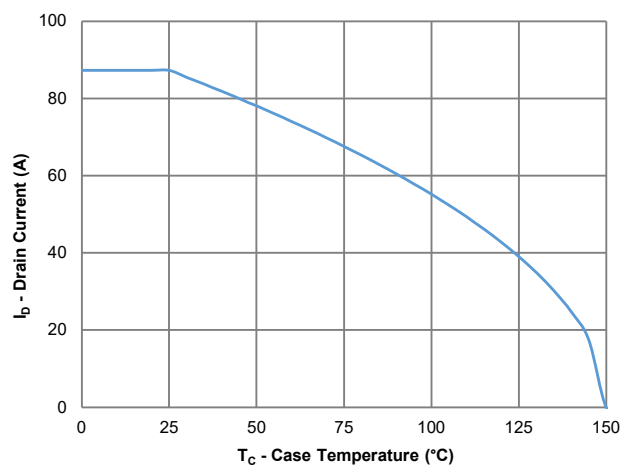


Figure 11: Current Derating

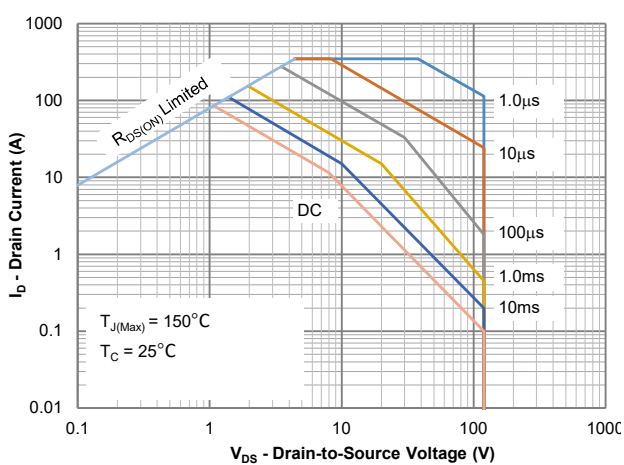


Figure 12: Safe Operating Area

Typical Electrical and Thermal Characteristics

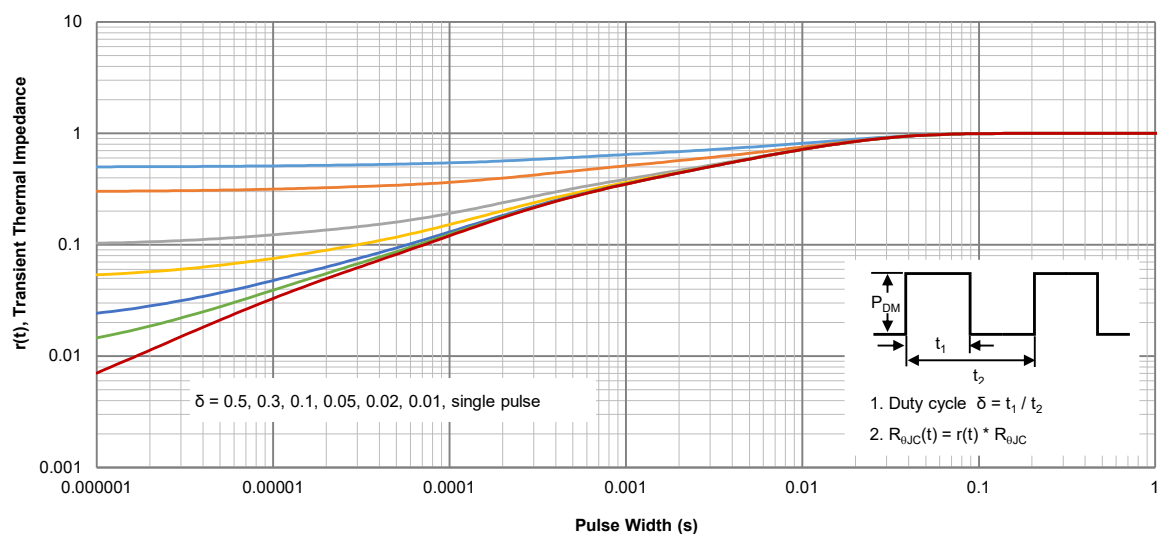
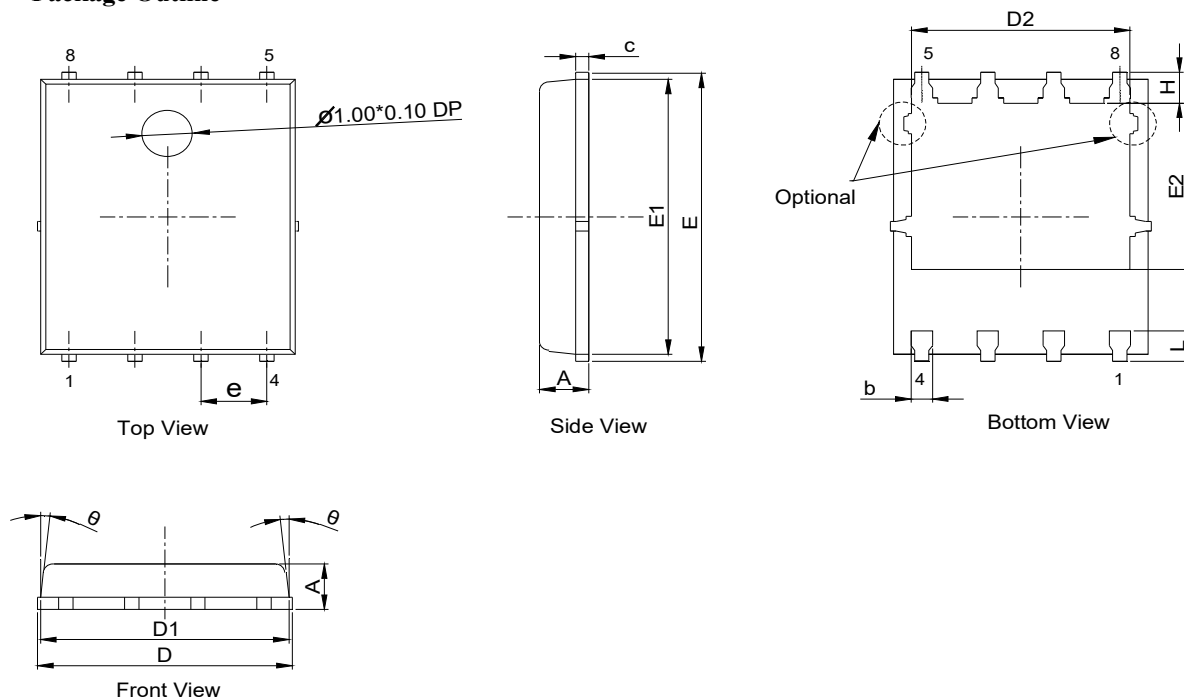
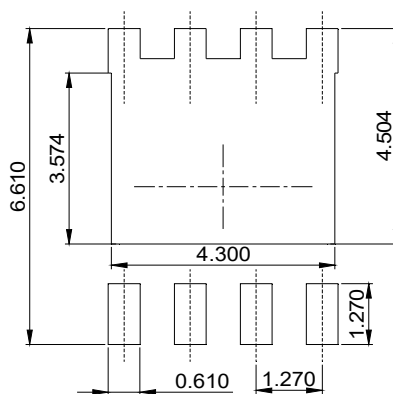


Figure 13: Normalized Maximum Transient Thermal Impedance

PDFN5060-8L Package Outline
Package Outline

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. ALL DIMENSIONS IN MILLIMETER (ANGLE IN DEGREE).
3. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE BURRS.

DIM.	MILLIMETER		
	MIN.	NOM.	MAX.
A	0.90	1.05	1.20
b	0.20	0.41	0.51
c	0.20	0.25	0.35
D	4.80	--	5.40
D1	4.65	--	5.30
D2	3.60	--	4.30
E	5.90	--	6.30
E1	5.60	--	6.00
E2	3.37	--	3.92
e	1.27BSC		
H	0.40	0.60	0.75
L	0.40	0.60	0.84
θ	0°	--	12°

Recommended Soldering Footprint

6

DIMENSIONS: MILLIMETERS